折页说明书：128g铜版纸四色印刷

C6 M68 Y100 K0

285.00 mm


155mm

620.00 mm

尺寸: 285X620 毫米

RK ROYAL KLUDGE

RK M87 MECHANICAL KEYBOARD

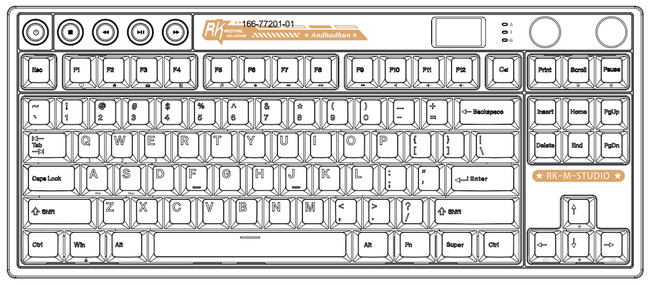

FCC WARNING:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

WHEN USING A KEYBOARD:

1.Maintain proper posture and avoid excessive force on the keys.
2.Take regular breaks to prevent hand fatigue.
3.Clean the keyboard regularly to remove dust and dirt.
4.Avoid exposing the keyboard to liquids.
5.Keep the keyboard in a suitable environment, free from extreme temperatures or humidity.

Remember these tips for a comfortable and durable keyboard experience.

WARRANTY 12 MONTHS WARRANTY

GUARANTEE
Non-human damage
12-month warranty

PRODUCT BASIC


Manual	Switch and Keycaps Puller	Keyboard	USB Type-c cable	2.4G Dongle
● Size: 364.3(L)×155.8(W)×40.7(H)±2	●Backlight: RGB	● Version: USB/2.4G/BT	● Layout: 88keys	● Switch: Mechanical switches

FUNCTION KEYS

Key Functions from left to right: Long press for three seconds to turn on/off

Stop | Last Song | Play/Pause | Next Song

WIRED MODE



Method 1: Insert the USB cable, press the left knob to enter the menu interface, select the USB mode, and confirm. The display screen will show "USB Success".

Method 2: Insert the USB cable and press Fn+R briefly to switch to wired mode.

It supports 5V 1A rated power supply to charge.

INDICATOR LIGHT / KNOB FUNCTION

A Caps Lock Scroll Lock Win Lock

Right knob
- Clockwise Volume +
- Counterclockwise Volume -
- Press to mute

※.**Volume calibration:**
If the volume display is incorrect, it will be automatically calibrated after the driver is turned on.
Driver download address: www.rkgaming.com

Left Knob
- Short press or rotate the knob to enter the settings menu.
- Short press for confirmation, rotate to select.

MANUAL TIME SETTING

Do the following from the main Time screen:

YY:MM:DD
HH:MM:SS

1.Access to time setting
Method 1: Press and hold the Left Knob for approximately 5 seconds until the year starts flashing, entering the manual adjustment mode
Method 2: Select Time Settings in the menu

2.Press the Left knob in turn to adjust the Date(YY/MM/DD) and Time (HH/MM/SS) respectively.


3.Similarly, rotate the knob to adjust the numbers: Clockwise to increase, Counterclockwise to decrease.

4.After completing the settings,

4.1:Press and hold the knob once more for 5s to save and exit Or Using the left knob to select "Yes"

4.2:Alternatively, you can short press Fn+T to quickly save and exit.

BT CONNECTION



BT connection with Knob:

1.Long press " " for 3 seconds to boot and press the left knob to access the menu.
Use the left knob to select any of the following icons: " BT1 BT2 BT3 "

Paring: For example, using the knob to select " BT1 " and then press and hold the left knob.
The screen will display " BT1Pairing " to indicate the pairing process is active.

Reconnection : For example, select " BT1 " using the left knob and then press it briefly.
The screen will display " BT1Linking " to indicate the device has entered the reconnection state.

BT connection with combination keys:

2.Long press " " for 3 seconds to boot,
Paring: Press and hold Fn+Q / W / E for 3 seconds, for example, long-press Fn+Q,
the display screen will show " BT1Pairing ", to indicate the pairing process is active.

Reconnection: Press Fn+Q / W / E, for example, press Fn+Q briefly, The screen will display " BT1 Linking " to indicate the device has entered the reconnection state.

3.Turn on your computer/mobile device's BT and search for the keyboard.
Connect to it with the displayed name: RK M87.


4.After the connection is successful, the display screen will show " BT1 Success ", and return to the Home screen automatically.

Similarly, follow the steps above to store 3 groups of different BT devices.



Friendly reminder: Prior to switching, kindly ensure that you have already paired three sets of BT devices.

2.4G CONNECTION



2.4G connection with Knob:

1.Long press " " for 3 seconds to boot and press the left knob to access the menu. Use the left knob to select the following icon: " ".

2.Press the left knob briefly to switch the keyboard to 2.4G mode, and the screen will display " 2.4GLinking " to indicate the keyboard is in reconnection state, and then insert the 2.4G dongle.

3.After a successful reconnection, the display screen will show " 2.4G Success " and return to the Home screen automatically.

2.4G pairing with knob:

1.Press the left knob to access the menu. choose the icon " " and long-press the left knob until the screen shows " 2.4GPairing ", and then insert the 2.4G dongle.


2.After a successful pairing, the display screen will show " 2.4G Success " and return to the Home screen.

2.4G pairing with combination keys:

1.Long-press Fn+P for 3 seconds until the display screen shows " 2.4GPairing " and then insert the receiver.


2.After a successful pairing, the display screen will show " 2.4G Success " and return to the Home screen.

Friendly reminder: The devices are already paired at the factory, so there is no need to pair them again.



2.4G Storage Area

DISPLAY OPERATION



- Volume Adjustment
- Caps Lock
- Win Lock
- Win mode
- Mac mode
- Wired mode
- 2.4G
- BT

Home/Layout/Language
1. The main screen can be set to
1).Time interface
2).Customizable GIF image (with driver support)
2. Layout switching: Win/Mac
3. Language selection: English/Chinese

Backlight Effects/Colour Settings
1. Select the effect icon and press left knob.
Use the knob to choose different backlight effects.
2. Select the colour icon and press left knob.
Use the knob to choose different backlight colour.

Backlight Brightness/Speed Settings
1. Select the Brightness icon and press left knob.
Use the knob to adjust backlight brightness.
2. Select the Speed icon and press left knob.
Use the knob to adjust backlight effect speed.

BACKLIGHT CONTROL

- Fn + ↑ : Backlight brightness +
- Fn + ↓ : Backlight brightness -
- Fn + ← : Backlight speed -
- Fn + → : Backlight speed +
- Fn + Pause : (RGB Version only) Switch backlight color
- Fn + Scroll : Switch dynamic backlight effects
- Fn + space bar : Press and hold for three seconds to restore factory settings
- Fn + Win : Locking WIN key and APP key functions


青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: 772-英文说明书-100书写纸(620×285mm)-更新24-5-5.pdf 2024年5月6日 星期一

尺寸: 285X620 毫米

RK ROYAL KLUDGE

RK M87 MECHANICAL KEYBOARD

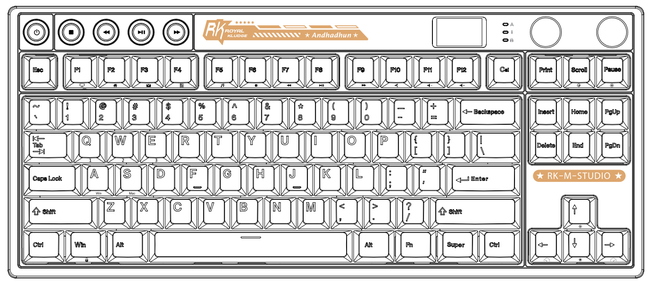

ISED STATEMENT:

English This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference,
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).
French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada.
L'exploitation est soumise aux deux conditions suivantes
(1) Cet appareil ne doit pas provoquer d'interférences,
(2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil,

l'appareil numérique du vient conforme canadien peut - 3 (b) / nmb - 3 (b).
This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance,cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2,5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité,
This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment,Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé,


BATTERIES:

A warning that batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the light,
1) Replacement of a battery with an incorrect type that can defeat a safeguard;
2) Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
3) Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
4) A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

WARRANTY 12 MONTHS WARRANTY

GUARANTEE
Non-human damage
12-month warranty

CUSTOM BACKLIGHT SET

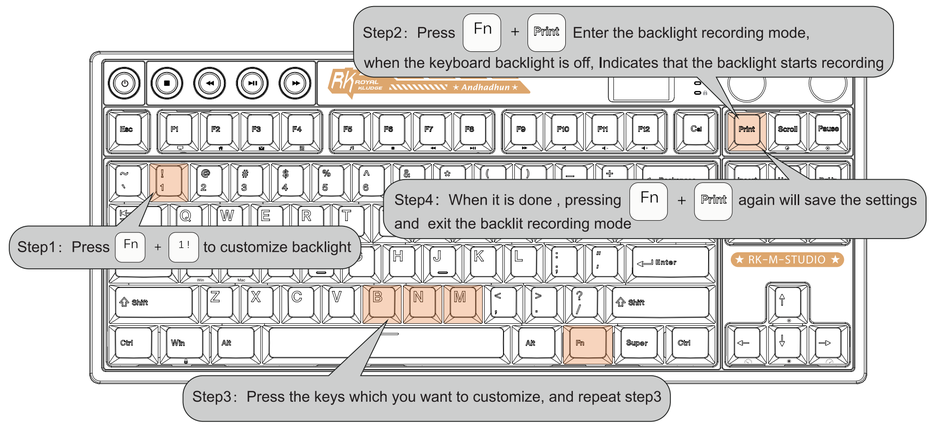

MULTIMEDIA KEY FOR WINDOWS

Windows system(Fn + A: switch to Windows system)

- Fn + F1 Computer
- Fn + F2 Browser
- Fn + F3 Mailbox
- Fn + F4 Calculator
- Fn + F5 Player
- Fn + F6 Stop
- Fn + F7 Last Song
- Fn + F8 Play / Pause
- Fn + F9 Next Song
- Fn + F10 Mute
- Fn + F11 Volume-
- Fn + F12 Volume+

MULTIMEDIA KEY FOR MAC

MAC system(Fn + S: switch to Mac system)

- Fn + F1 Screen Brightness -
- Fn + F2 Screen Brightness +
- Fn + F5 Keyboard Backlight Brightness-
- Fn + F6 Keyboard Backlight Brightness+
- Fn + F7 Last Song
- Fn + F8 Play / Pause
- Fn + F9 Next Song
- Fn + F10 Mute
- Fn + F11 Volume-
- Fn + F12 Volume+

Have an issue with one of our RK products?

Feel free to contact us with any product issues or questions.
We will reply as quickly as possible to ensure all your needs are handled.
For better technical support, please contact rkgaming@rkgaming.com

RK ROYAL KLUDGE

Executive standard:GB/T 14081-2010
Made in China www.rkgaming.com
Download Driver Address: www.rkgaming.com/Download/1/
166-77201-01

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: 772-英文说明书-100书写纸(620×285mm)-更新24-5-5.pdf 2024年5月6日 星期一